
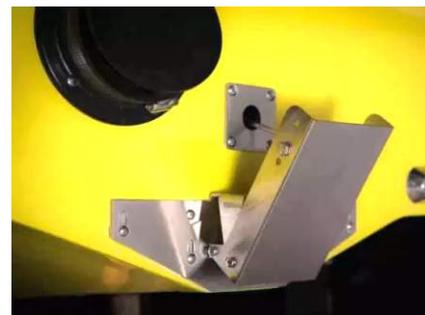


# All Nautiques

**For measurements W, X and Y, measure to the edge of the flange, the largest part of the exhaust outlet.**

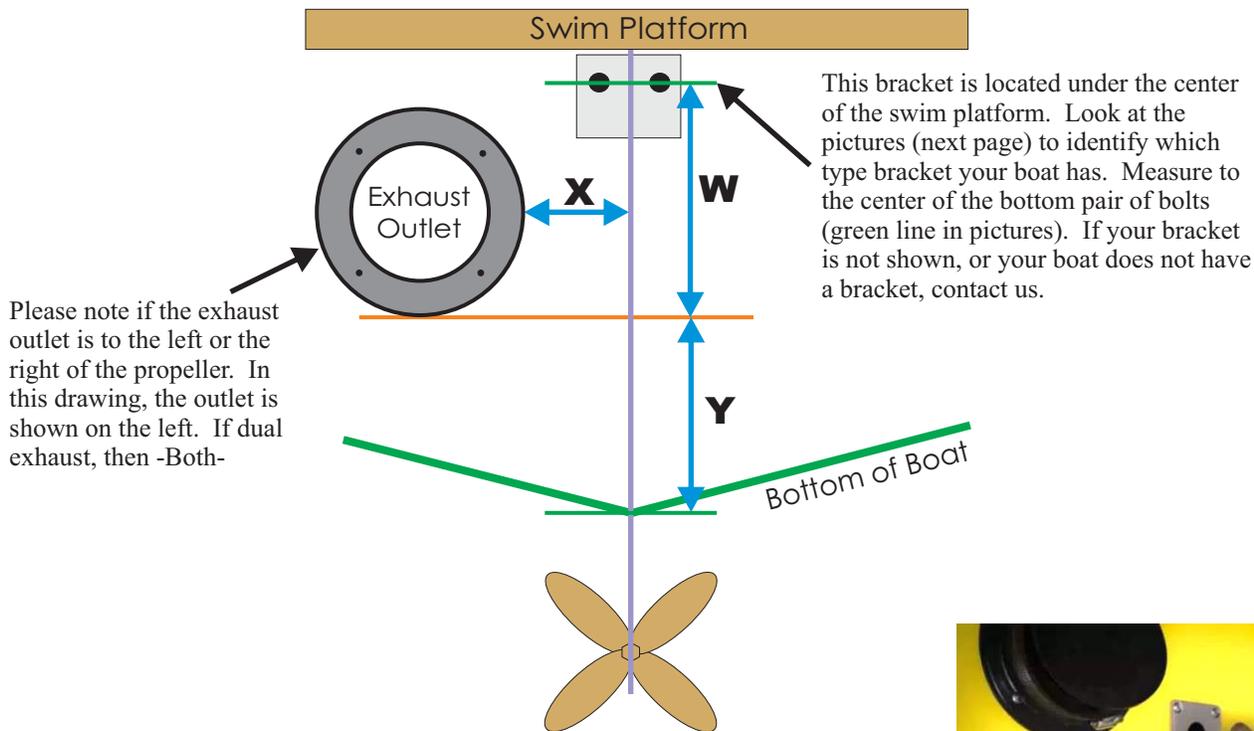

Hydro Gate

To obtain the most accurate measurements, place masking tape on your hull vertical to the center of the propeller (purple line in drawing) and mark the tape. A square or level is helpful but not necessary.


Measurement X requires the most accuracy. Measure X from the center line (purple) to the edge of the exhaust outlet. The exhaust outlet is 6" in diameter. It is the outermost portion of the exhaust outlet that we want you to measure to.

For measurement Y, it may be difficult to determine the bottom of the boat we are asking you to measure to. Just pick what seems to be the bottom edge. The accuracy of this measurement is not critical.

1. Is the exhaust outlet located on the: -Left- -Right- -Both/Dual-
  2. If both/dual, are they -Level- or is the -Left- or -Right- higher by \_\_\_\_\_ inch.
  3. What is measurement -X- \_\_\_\_\_ or if "Dual" see additional measurements page.
  4. Center platform bracket (see pictures): Ring 2 3 4 6 -holes, Spacer -Yes- -No-
- What are measurements -W- \_\_\_\_\_, -Y- \_\_\_\_\_.

Does your boat the Nautique Hydro Gate - see picture above: -Yes- -No-

Please email these measurements to us: [mail@FreshAirExhaust.com](mailto:mail@FreshAirExhaust.com)

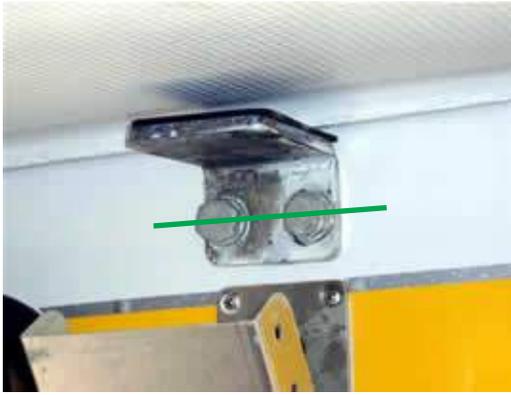

2 hole bracket



Horizontal Ring



Vertical Ring



3 hole bracket



6 hole bracket



4 hole bracket



4 hole bracket with spacer